


210*240mm

Nilight Dual Mode LED Light Wiring Instruction

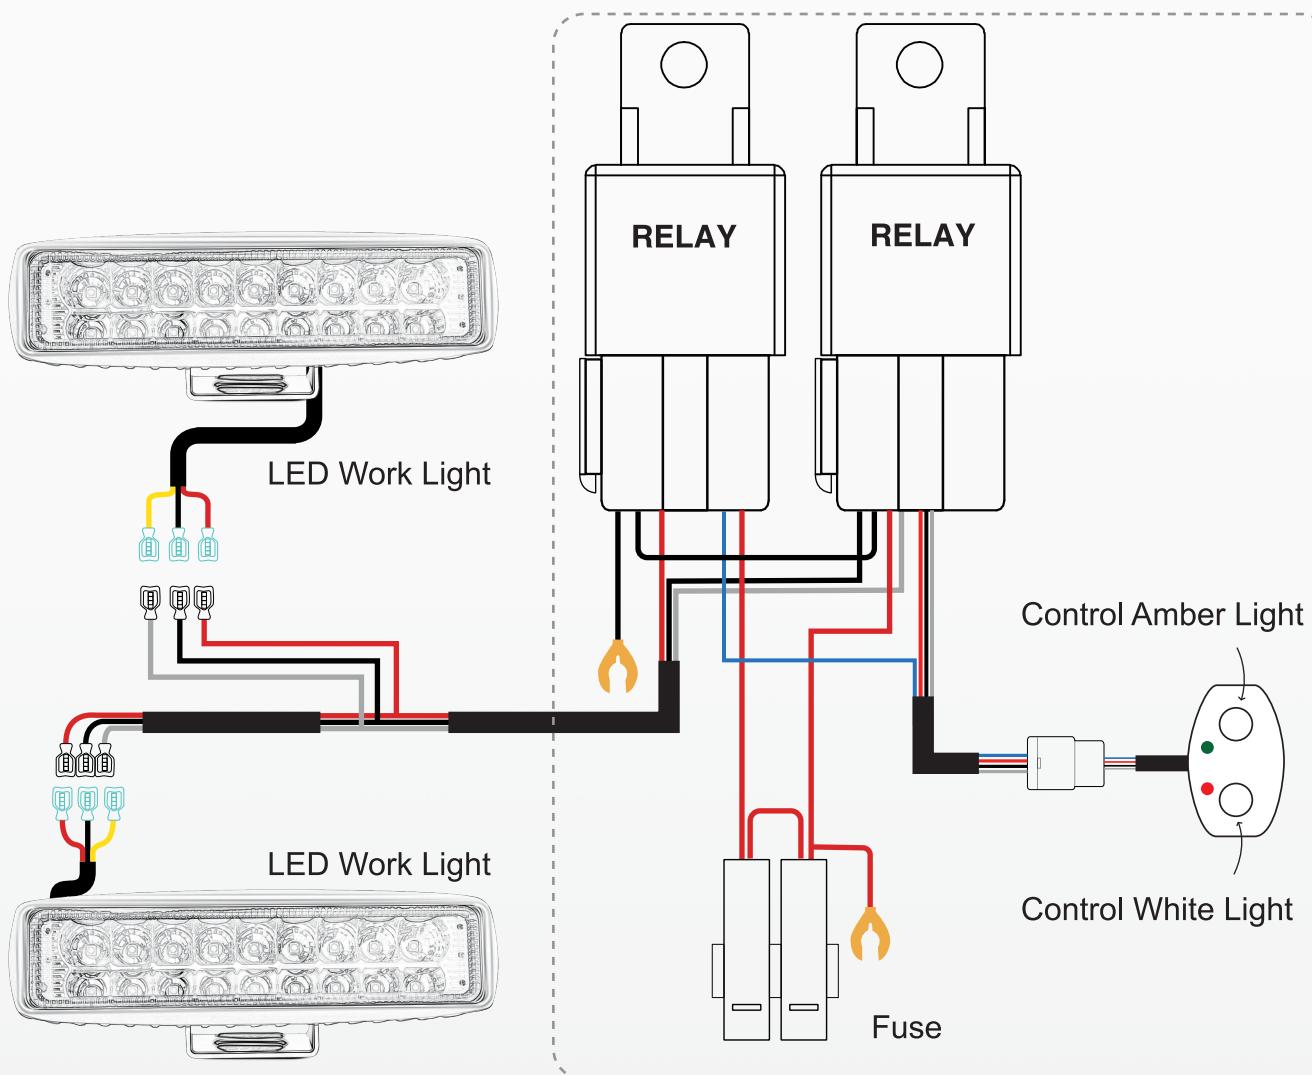

Note: Dual control harness kit above will need to purchase separately

Installation:

1. Connect light bar wires to wiring harness terminals respectively, black to black, red to red, yellow to yellow.
2. Connect wiring harness to the car battery. Red wire (+) with fuse and yellow wire to positive, black wire(-) to negative
3. Turn on the power and press switch on/off to test the light.

Caution:

1. The operating voltage is 12V DC
16AWG: Max. Wattage 180W
14AWG: Max. Wattage 300W
12AWG: Max. Wattage 450W
2. Please make sure all the exposed wires were securely wrapped by electrical insulating tape to prevent short circuit.
3. Please strictly follow the instructions to avoid any hazards. If you do not feel comfortable with the installation we recommend having a professional to install or install under his guidance.