


148X210mm

M LIGHT *Adjustable Hitch Spare Tire Mount*

FOR VEHICLE WITH 2 INCH RECEIVER

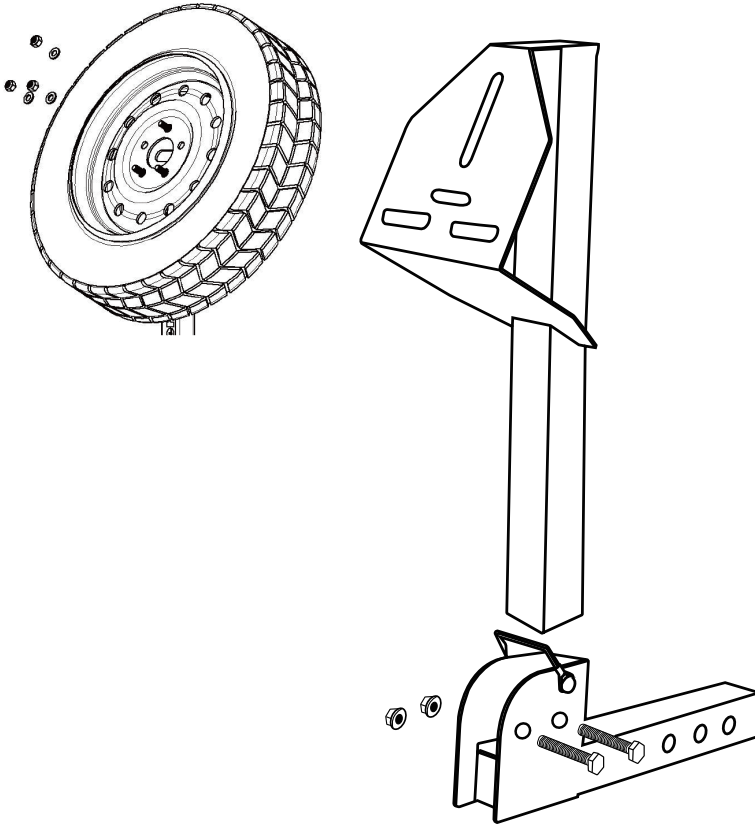

INSTALLATION STEPS

1. Insert the spare tire carrier into the hitch receiver.
2. Install trailer coupler pin and bolts to connect the spare tire bracket to the receiver tube.
3. Align tire lug holes through each carriage bolt and place tire against mounting plate. Complete installation with bolt fittings.

Note: This hitch-mounted spare tire rack provides convenient access to your trunk. Simply remove the pin and fold down the tire mount.