



Wide Flat Front Fender Flares

For 2018-2024 Jeep Wrangler JL & Gladiator JT

Front Fender Flares Accessories List



L-A x1



L-B x1



C x2



R-A x1



R-B x1



D x2



E x2



F x2



wrench x1



M6*12 x22



M6*20 x28



M6 x22



M6 x32



M6x28



Rivet nut x22



M8*25 x2



M8 x2



M8x2



M8x2



M5*12 x4



M5 x4



Light bracket x2



Rubber Strip x2



Riveter x1

Installation Instruction

Front Fender Flares


STEP 1: Front (Stock) Fender Flare Removal

(FIG1) Using a 7mm socket locate and remove 5 hex head bolt securing the factory flare into position.

(FIG2) Take hold of the front part of the flare and firmly pull up to release the hidden factory mounting clips as shown above.

(FIG3) Move to the center of the flare then rear of the flare pulling firmly up and back. You will hear a clicking sound as the clips are released. Repeat steps above for other side.

(FIG4) Disconnect turn signal harness by firmly pressing down on the Mate-n- lock plug.

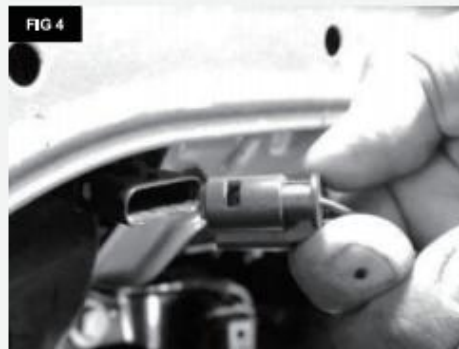

STEP 2:

2-1: Install **Rivet Nut** in the corresponding holes on the car.

2-1-1: Insert the **rivet nut** into the mandre on the **riveter** and put into the hole. (Fig 5) (Fig 6)


Installation location:



Accessories:



2-1-2: Rivet the **nut** into the place (until the **nut** is deformed). (Fig 7) (Fig 8)

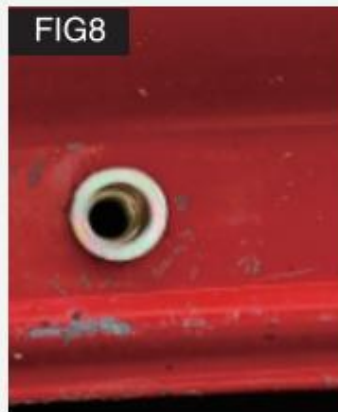

Working principle of rivet nuts



2-2: Install the **rubber strip** on the front fender flare. (Fig 9) (Fig 10)

Installation location:



Accessories:




2-3: Install the **front fender flare** on the car, using **M6X20 screws**, **M6 rings** & **M6 washers**. Finally tighten all the screws with **wrench**.(Fig 11) (Fig 12)

Accessories:





2-4: Install with **M6X20 screws**, **M6 washers** and **M6 nuts**.(Fig 13)

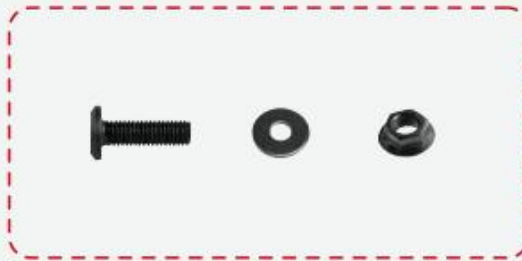


3-4: Assemble **R-A** and **R-B** with **M6X12**(Fig 14) (Fig 15) and **D** with **M6X20** (Fig 16) (Fig 17) **M6 washers** screws & **M6** nuts.

Installation location:




Accessories:



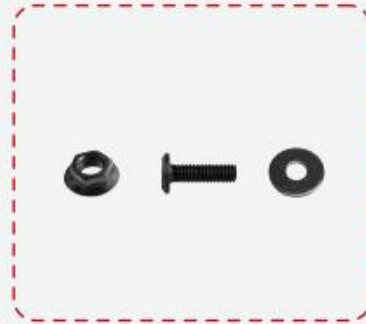


2-6: Install C onto R-A with M6*12 screws & M6 nuts. (Fig 18) (Fig 19)

Installation location:

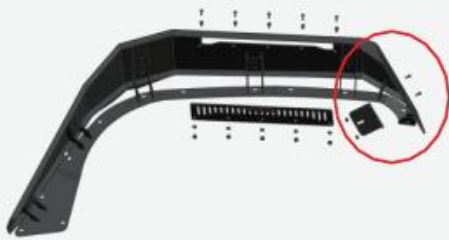

Accessories:


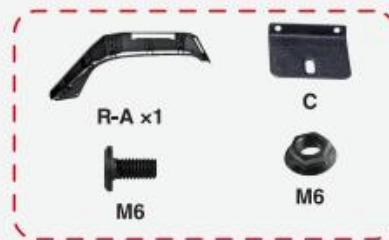


STEP 4: Install Driver Side Front Fender Flare

Note: Please check whether the light is working properly before installation.

4-1: Assemble the lamp with iwn screw package. (Fig 20-23)

Accessories:

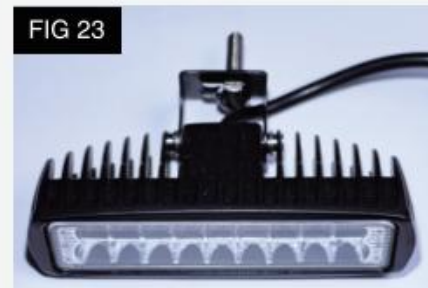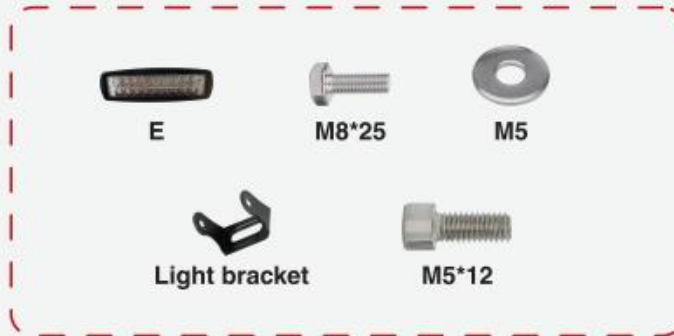

4-2: Install the assembled lamp of 4-1 onto the main body of 2-6 and tighten the screws. (Fig 24) (Fig 25)



4-3: Connect the Switching interface of F to the vehicle wires. (Fig 26-29)

Accessories:

